


We Make Solar Evolve

# EiTe POLY

## Polycrystalline Module

ET-P660270WW/WB 270W

ET-P660265WW/WB 265W

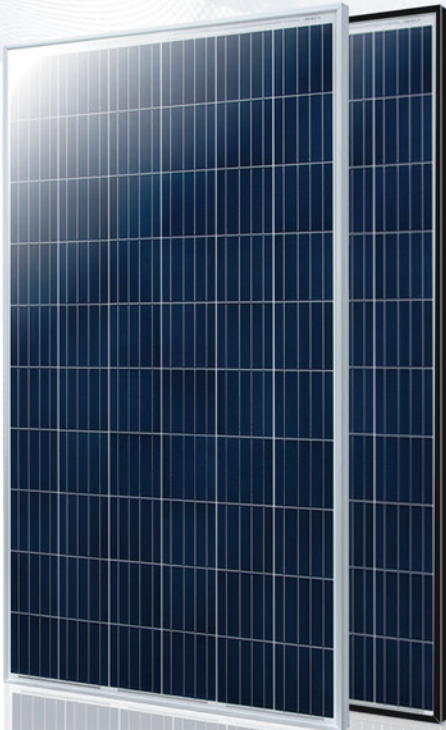

Rich Product Portfolio & Innovative Product Strategy, satisfy customer needs to the best, and keep the customers' overall costs to the lowest.



### High Conversion Efficiency

Industry-leading processing techniques realize great module efficiency to a maximum of 16.60%, steady power output guaranteed.



### Anti-reflective Coating and Reduce O&M Costs

Easier to clean by rainwater to remove dirt on the glass surface, making higher power output and lower maintenance costs.



### 0 to +5W Positive Tolerance

Gain more power yields than expected.




### Excellent Loading Capability

2400Pa wind loads, 5400Pa snow loads.  
Durable and long-lasting.



### Top-quality & Trustworthy Product

Rigorous Quality Management System built.  
Multiple internationally recognized PV industry standard certifications attained.

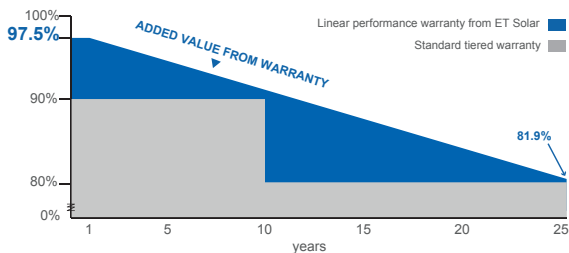

25 25-year performance warranty

10 10-year warranty on materials and workmanship

IEC 61215 Ed.2  
IEC 61730  
IEC 61701  
IEC 62716



# ET Solar

[www.etsolar.com](http://www.etsolar.com)

M/ET-PD-EN-EU2017V2

## ELECTRICAL SPECIFICATIONS (STC)

Model Type	ET-P660270WW ET-P660270WB	ET-P660265WW ET-P660265WB
Peak Power (Pmax)	270W	265W
Module Efficiency	16.60%	16.29%
Maximum Power Voltage (Vmp)	30.97V	30.74V
Maximum Power Current (Imp)	8.72A	8.62A
Open Circuit Voltage (Voc)	38.72V	38.29V
Short Circuit Current (Isc)	9.31A	9.24A
Power Tolerance	0 to +5W	
Operating Temperature	- 40 ~ + 85°C	
Maximum System Voltage	DC 1000V	
Nominal Operating Cell Temperature	45±2°C	
Fire Safety	Class C	
Maximum Series Fuse Rating	20A	

## ELECTRICAL SPECIFICATIONS (NOCT)

Model Type	ET-P660270WW ET-P660270WB	ET-P660265WW ET-P660265WB
Peak Power (Pmax)	199.1W	196.8W
Maximum Power Voltage (Vmp)	28.5V	28.3V
Maximum Power Current (Imp)	6.98A	6.96A
Open Circuit Voltage (Voc)	35.90V	35.5V
Short Circuit Current (Isc)	7.48A	7.45A

## MECHANICAL SPECIFICATIONS

Cell Type	156.75 mm x 156.75 mm
Number of Cells	60 cells in series
Weight	18.5 kg (40.79 lbs)
Dimension	1640×992×35 mm (64.57×39.06×1.38 inch)
Max Load	5400 Pascals ( 112 lb/ft <sup>2</sup> )
Junction Box	≥IP67 rated
Connector	MC4 Compatible
Output cable	PV 1-F 4mm <sup>2</sup>

## TEMPERATURE COEFFICIENT


Temp. Coeff. of Isc (TK Isc)	0.04% /°C
Temp. Coeff. of Voc (TK Voc)	-0.34% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.41% /°C

## PACKING MANNER

Container	40' HQ
Pieces per Pallet	30
Pieces per Container	840


## PHYSICAL CHARACTERISTICS

Unit:mm (inch)

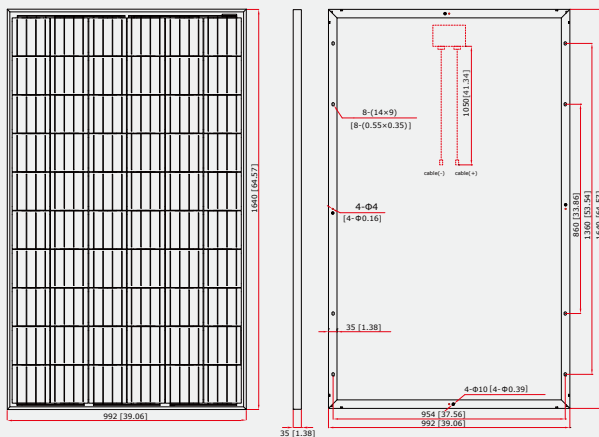


## ELECTRICAL CHARACTERISTICS

Temperature Dependence of Isc, Voc and Pmax



Irradiance Dependence of Isc, Voc and Pmax (AM1.5, Cell Temperature 25°C)



**Note:** the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m<sup>2</sup> solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m<sup>2</sup>, 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.

Please contact [support@etsolar.com](mailto:support@etsolar.com) for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.